



Material Introduction


Introduction

CX steel is a good corrosion resistance material that heat treatment will not affect too much on manufactured parts.

Powder Chemical Composition (wt.%)

Element	Cr	Ni	Мо	Al	Mn	Si
Content Range	11–13	8.4-10		1.2-1.8	0.1-0.3	0.1-0.3
Element	С	Р	S	Ο	Ν	Fe
Content Range	≤0.03	≤0.02	≤0.02		≤0.02	Bal.

Powder EM Diagram (spherical degree of 0.9)

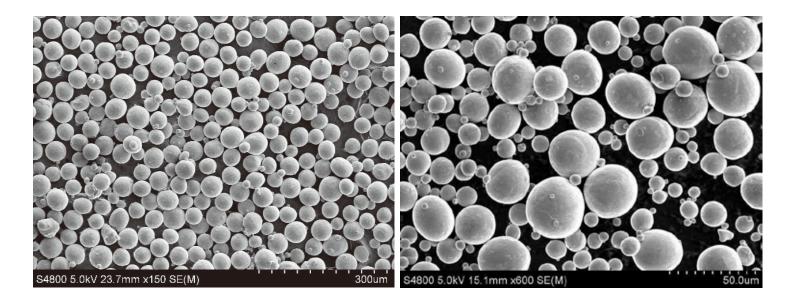

Advantages

CX steel has a good corrosion resistance combined with high strength and hardness. The parts made by CX stell are easily machinable.

Tolerance

200 µm or 0.2%

Attributes

Performance	Printing State	Thermal Treatment State
Tensile Strength (Mpa)	1100±100	1700±50
Yield Strength (Mpa)	850±50	1650±50
Hardness HRC/HV	33±2HRC	49±2HRC
Extensibility	17±3	8±2

Note: Surface hardness can vary greatly depending on how the specimen is prepared. Heat treatment process: 900 $^\circ\!C$ / 1h + 500 $^\circ\!C$ / 3h

Applications

CX steel is mainly suitable for injection mold and mold conformal cooling channel printing, and other industrial applications where high strength and hardness are required.